


Teranex Mini Analog to SDI 12G



Convert from analog video to 12G-SDI. Convert incoming analog video signals to SD, HD, 6G and 12G-SDI. Ideal for converting your analog devices such as Betacam SP, VHS, set top boxes, gaming consoles and HDV cameras to incredible quality SD/HD/Ultra HD SDI video up to 2160p60.

£389

Connections

SDI Video Outputs

2 x 12G-SDI outputs.

Analog Video Inputs

Composite, Y/C or Component.

Analog Audio Inputs

2 channels professional balanced analog audio via XLR connectors. Right XLR can be configured for timecode input.

Digital Audio Inputs

4 channels professional 110Ω balanced digital audio via XLR connectors. Right XLR can be configured for timecode input.

Multi Rate Support


SDI output switchable between HD for composite and S-Video and Ultra HD for component HD.

Updates and Configuration

USB or Ethernet.

Reclocking

Yes

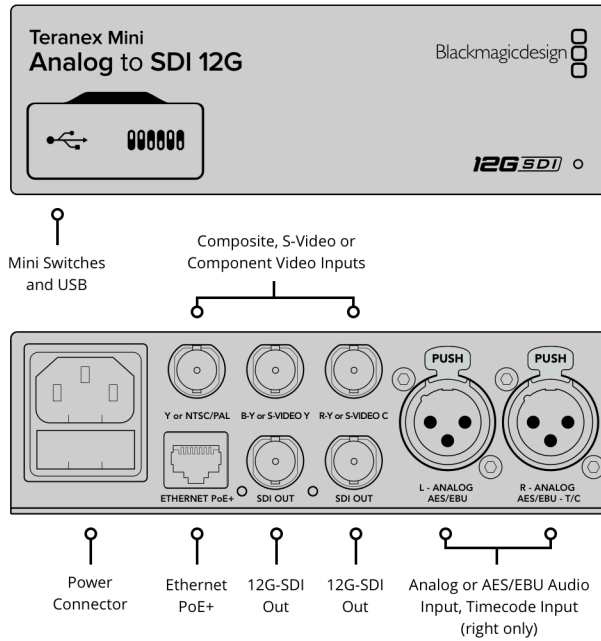

Standards

SDI Video Standards

525i59.94 NTSC, 625i50 PAL
 720p50, 720p59.94, 720p60
 2160p25, 2160p29.97, 2160p50,
 2160p59.94
 1080i50, 1080i59.94, 1080i60

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE
 296M, SMPTE 372M, SMPTE 424M,
 SMPTE 425M Level A and B, SMPTE
 2081-1, SMPTE 2081-10, SMPTE
 2082-1 and SMPTE 2082-10

SDI Video Rates

SDI video connections are switchable
 between standard definition and high
 definition.

SDI Video Sampling

4:2:2 and 4:4:4.

SDI Audio Sampling

Television standard sample rate of 48
 kHz and 24-bit.

SDI Color Precision

YUV 4:2:2 and RGB 4:4:4 in HD, 2K
 and 4K.

SDI Color Space

REC 601, REC 709

Analog Video Standards

525i59.94 NTSC, 625i50 PAL

Analog Color Space

REC 601, REC 709

Analog Color Precision

4:2:2

Software

Software Control

Mac™ and Windows™ software
 upgrade via USB and Ethernet

Internal Software Upgrade

Via included updater application.

Operating Systems



Mac 10.14 Mojave,
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

Settings Control

Basic Settings Control

Mini Switches, USB and Ethernet via
free software utility

Optional Front Panel Control

Front mounted Smart Panel with LCD,
rotary knob and six settings buttons

Power Requirements

Power Supply

1 x built in international AC power
supply with IEC C14 inlet. IEC Power
cable required. 100 - 240V AC Input.

Power Over Ethernet

Can be powered via 48V DC using
PoE+ (power over ethernet).

Power Consumption

16 Watts

Operational Voltage Range

100 - 240V AC

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Teranex Mini Analog to SDI 12G
SD card with software and manual

Warranty

3 year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller